

True Voice

PROFESSIONAL SPEAKER®


PS-12R1



SPECIFICATIONS

Frequency	35Hz - 20kHz (-10 dB)
Sensitivity	137 dB (SPL Max)
Impedance	8 Ω
Power RMS	500 Watts
Power Program	1000 Watts
Power Peak	2000 Watts
Bass	1 x 12 inch High-excursion
Treble	1 x 3 inch Titanium diaphragm
Input	SpeakON NL-4 x 2
Coverage	110° x 20° (H x V)
Designed in Australia Made in China	

Dimensions	595 x 370 x 345
Weight	28 kg
Box construction	15mm Plywood with weather proof paint
Installation options	Vertical shaft, 12 x M10 flying points

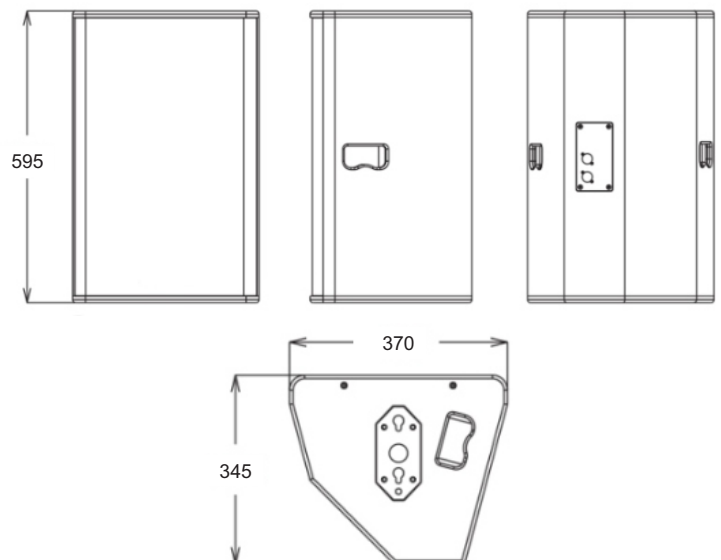

Specifications Subject To Change Without Notice

