

Thank you for using the company's production of PAR LED 60 x 3W (3in1), users have to read and keep in accordance with the contents of the manual operation in order to ensure the right and safe installation, use and maintenance ; and the company assumes no responsibility when users are not in accordance with the requirements to install, use and maintain resulting in damaging to lighting, property or personal injury . Please take good care of this prospectus when necessary.

SECURITY TIPS

In order to ensure your safety and the correct use of lighting. Please carefully read the following safety tips to avoid injury and unnecessary failures before use .

- 1, non-professionals, not the to disassemble the light arbitrarily and lighting accessories inside.
- 2, rated voltage range: AC 100V-240V 50/60Hz (to be selected).
- 3, not beam irradiate the flammable materials, flammable materials and the lamp should be maintained at least 1M over the distance.
- 4, to keep away from the liquid substance and humid environment.
- 5, before using the lights must ensure the good grounding , can not install charging and remove any parts.
- 6, the installation of lamps, must be fixed screw fasteners with additional security cable and regular inspection.
- 7, lamps consecutive working hours is not recommended more than 10 hours.
- 8, should stop using the lights in time when happens unusual conditions during the process

Made in China



KALE


PAR LED LIGHT 60 x 3W (3 in 1)

USER MANUAL



**Please read this user manual carefully before using
this product!
Keep it for further reference**

1. The Introduction of LED display panel :

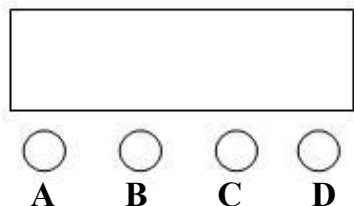

- A. Menu
- B. UP
- C. DOWN
- D. ENTER

Instructions: Press Menu A cycled out eight different functional effects, digital tube in which the first two digits represent the current function (see Menu). After two digits to represent the kinds of functions is located. Address code. Or speed parameters. Press B or C keys to modify the parameter values. Press the D key to confirm.

2. Function of LED Display Window (press button D to confirm all the function)

No	Display	Function
1	D0001	CH8 Add Code, with B.C button to change the code (001-512)
2	CC00	Color Pulse Speed, adjustable by B or C button (01-99)
3	CP00	Color Change Speed, adjustable by B or C button (01-99)
4	DE00	Color Mixed Change, changing speed adjustable by B or C button (01-99)
5	BE00	Music activated
6	R220	Red, with B.C button to change the color (0-255)
7	G220	Green, with B.C button to change the color (0-255)
8	B220	Blue, with B.C button to change the color (0-255)
9	W220	White, with B.C button to change the color (0-255)

3. DMX512 Channel Description

Channel	Function	Explanation
Channel 1	General Dimmer	R.G.B.W linear 0% - 100% dimmer, from dark to bright
Channel 2	General Strobe	R.G.B.W strobe from slow to fast
Channel 3	Control Mode selection	0-50 CH8 control 51-100 color pulse 101-150 gradual change 151-200 slow change 201-255 sound control
Channel 4	Control Mode Speed	From slow to fast
Channel 5	R Dimmer	Red (1-255, dimmer, from dark to bright)
Channel 6	G Dimmer	Green (1-255, dimmer, from dark to bright)
Channel 7	B Dimmer	Blue (1-255, dimmer, from dark to bright)
Channel 8	W Dimmer	White (1-255, dimmer, from dark to bright)

4. Specification :

Machine Power	180 Watts
LED power	3W (Driving current 290 mA)
LED QT	Y60 pcs x 3W (3 in 1)
Channel DMX	3 / 7 CH
Voltage	AC100V-240V 50/60Hz
Control mode	DMX 512, Manual, Master-slave, Auto, Sound Active, Stand along
Beam Angle	30°
Brightness	9000 LUX at 2 meter
Work ing temperature	10° to 40° ambient
Noise	<50 dBm distance
Indoor	IP 20
Size	220 x 220 x 160 mm
Net weight	2.6 kg