

# True Voice


## PROFESSIONAL SPEAKER®

### PS12R2A



#### SPECIFICATIONS

|  |  |
|--|--|
| Frequency                              | 42Hz - 23kHz   |
| Sensitivity                            | 110 dB - 137 dB  |
| Impedance                              | 8 $\Omega$   |
| Power                                  | 1000 Watts   |
| Bass                                   | 1 x 12 inch high-output LF driver<br>PM 15                       |
| Treble                                 | 1 x 1.4" Voice coil, titanium dome<br>compression driver, PAD 45 |
| Dimensions                             | 595 x 370 x 345  |
| Weight                                 | 28 kg  |
| Designed in Australia<br>Made in China |  |

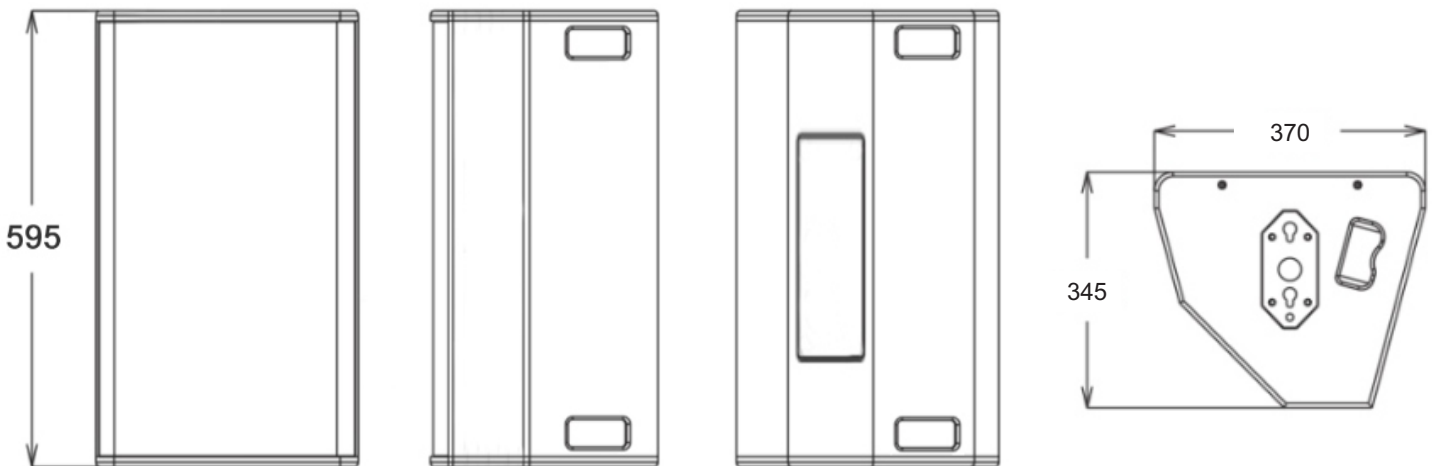

Specifications Subject To Change Without Notice

